


TOWNSHIP OF CLINTON
BOROUGH OF LEBANON

COUNTY OF HUNTERDON

END PROJECT
RT. 22
STA. 287+50
MP. 22.48

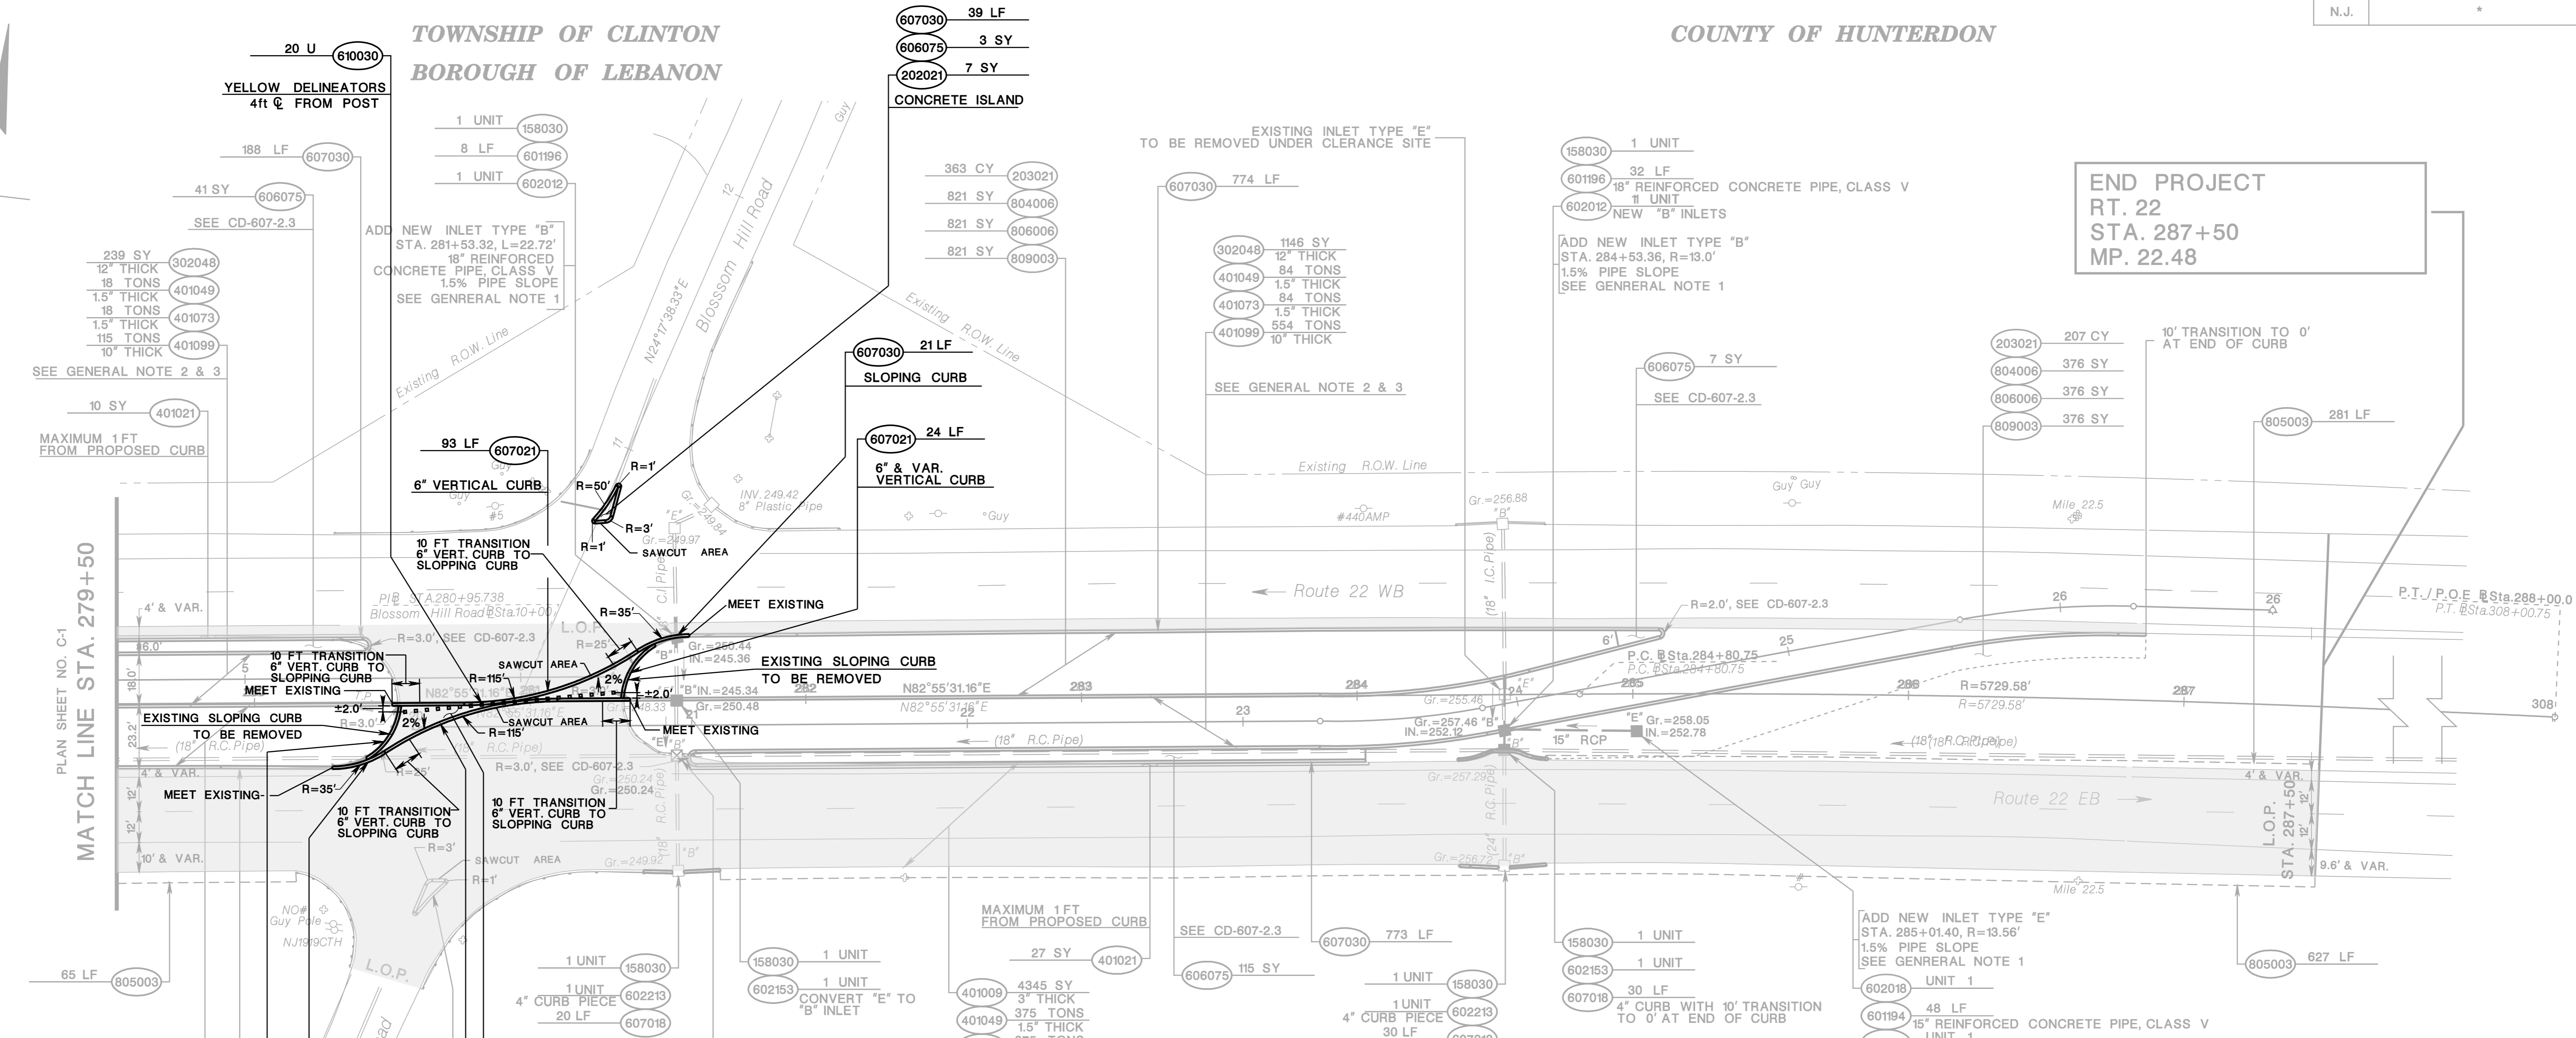

PLAN SHEET NO. C-1
MATCH LINE STA. 279+50

CHANGE OF PLAN NO. 1

ITEM	TO BE CONSTRUCTED	CONTRACT QUANTITY	IF & WHERE DIRECTED	C-2 TOTAL QUANTITY	ADD/DEL	NEW QUANTITY
158030M	INLET FILTER TYPE 2, 2' X 4'	6 UNITS		6 UNITS		
158033M	INLET FILTER TYPE 2, 4' X 4'	2 UNITS		2 UNITS		
158009M	HEAVY DUTY SILT FENCE, ORANGE		1520 L.F.	1520 L.F.		
201003P	CLEARING SITE			LUMP SUM		
202009P	EXCAVATION, UNCLASSIFIED	1040 C.Y.	104 C.Y.	1144 C.Y.		
203021P	I-14 SOIL AGGREGATE			***		
203041P	GEOTEXTILE, ROADWAY STABILIZATION		555 S.Y.	555 S.Y.		
302048P	DENSE-GRADED AGGREGATE BASE COURSE, 12" THICK	1385 S.Y.	139 S.Y.	1524 S.Y.		
302051P	DENSE-GRADED AGGREGATE BASE COURSE, VARIABLE THICKNESS		39 C.Y.	39 C.Y.		
302060P	COARSE AGGREGATE, SIZE NO. 57		93 C.Y.	93 C.Y.		
401009P	HMA MILLING, 3" OR LESS	4345 S.Y.	435 S.Y.	4780 S.Y.		
401021M	HOT MIX ASPHALT PAVEMENT REPAIR	37 S.Y.	3 S.Y.	40 S.Y.	+5 S.Y.	45 S.Y.
401027M	POLYMERIZED JOINT ADHESIVE		825 L.F.	825 L.F.		
401030M	TACK COAT		1752 GAL.	1752 GAL.		
401036M	PRIME COAT		318 GAL.	318 GAL.		
401049M	HOT MIX ASPHALT 9.5 M E SURFACE COURSE, 1.5" THICK	477 TONS	48 TONS	525 TONS		
401073M	HOT MIX ASPHALT 9.5 M E INTERMEDIATE COURSE, 1.5" & VAR. THICK	477 TONS	48 TONS	523 TONS		
401099M	HOT MIX ASPHALT 25 M 64 BASE COURSE, 10" THICK	669 TONS	67 TONS	736 TONS		
601194P	15" REINFORCED CONCRETE PIPE, CLASS V	48 L.F.		48 L.F.		
601196P	18" REINFORCED CONCRETE PIPE, CLASS V	40 L.F.		40 L.F.		
602012M	INLET, TYPE B	2 UNITS		2 UNITS		
602018M	INLET, TYPE E	1 UNIT		1 UNIT		
602153M	RECONSTRUCTED INLET, TYPE B, USING NEW CASTING	2 UNIT		2 UNIT		
602159M	RECONSTRUCTED INLET, TYPE E, USING NEW CASTING	1 UNIT		1 UNIT		
602213M	CURB PIECE	2 UNITS		2 UNITS		
606075P	CONCRETE ISLAND, 4" THICK	171 S.Y.		171 S.Y.	+3 S.Y.	174 S.Y.
607018P	9" X 16" CONCRETE VERTICAL CURB	80 L.F.		80 L.F.		
607030P	12" X 13" CONCRETE SLOPING CURB	1994 L.F.		1994 L.F.	+81 L.F.	2075 L.F.
804006P	TOPSOILING, 4" THICK	1428 S.Y.	134 S.Y.	1562 S.Y.		
805003M	TURF REPAIR STRIP	973 L.F.		973 L.F.		
806006P	FERTILIZING AND SEEDING, TYPE A-3	1428 S.Y.	134 S.Y.	1562 S.Y.		
809003P	STRAW MULCHING	1428 S.Y.	134 S.Y.	1562 S.Y.		
202021P	REMOVAL OF PAVEMENT	0 S.Y.	0 S.Y.	0 S.Y.	+76 S.Y.	76 S.Y.
606078P	CONCRETE ISLAND, 6" THICK	0 S.Y.	0 S.Y.	0 S.Y.	+45 S.Y.	45 S.Y.
607021P	9" X 18" CONCRETE VERTICAL CURB	0 U	0 U	0 U	+234 L.F.	234 L.F.
610030M	FLEXIBLE DELINEATOR, GROUND MOUNTED	0 U	0 U	0 U	+20 U	20 U

C.O.P. NO. 1
SHEET 1 OF 4



NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION PLANS
ROUTE 22 & BLOSSOM HILL RD.
MAINTENANCE WORK ORDER
MP 22.25 TO 22.48